

Installing the ASellerTool PDA Software V9 (New Installation)

Contents

Chapter 1: Desktop Installer (Windows User)	2
1.1: Prerequisites	2
1.2: PDA is connected to the Computer.....	2
1.3: Download and Run the Installer Program.....	4
1.4: Deploy the Installer to the PDA, and Install ASellerTool	7
1.5: Configure the Scanner Button.....	10
1.6: Install Connect!Agent on the PDA for Socket Bluetooth Scanner	13
Chapter 2: SD Card Installer (Mac User).....	20
2.1: Downloading and Positioning the Installer Program	20
2.2: Installing the Program Package.....	30
2.3: Socket Bluetooth Scanner User: Install Connect!Agent on the PDA via an SD card	36

Note: If you currently have ASellerTool software installed on your PDA, you do not need to install this entire installer package. Please read our Upgrade Guide at [here](#)

Chapter 1: Desktop Installer (Windows User)


1.1: Prerequisites

1. You are operating a Windows computer (Windows XP, Vista, or 7), with Microsoft [ActiveSync](#) or [Windows Mobile Device Center](#) already installed.
2. You have connected your PDA to the computer via a USB data sync cable.
3. After connecting your PDA to the computer with the USB data sync cable, it displays 'Connected' in either ActiveSync or Windows Mobile Device Center window.

1.2: PDA is connected to the Computer

Make sure that Microsoft ActiveSync or Windows Mobile Device Center is showing 'Connected' after you connect PDA to your computer.

If you have not installed these programs before, please refer to our tutorials for either [ActiveSync](#) on Windows XP, or [Windows Mobile Device Center](#) on Vista and Windows 7.

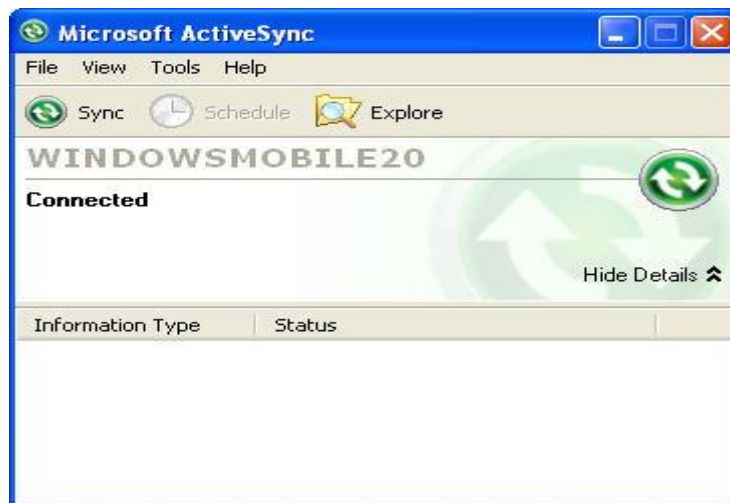

This screen indicates that the PDA is properly connected to the computer.

Figure 1 ActiveSync

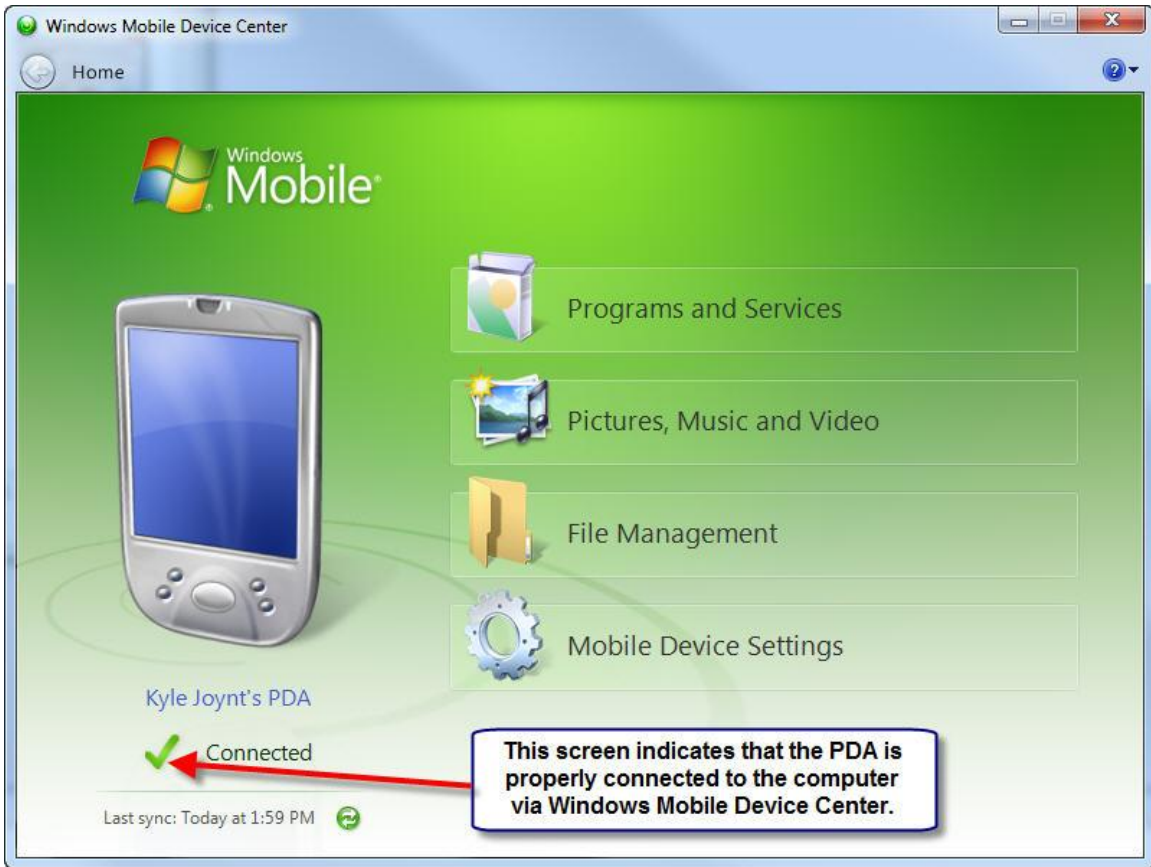


Figure 2 Windows Mobile Device Center

1.3: Download and Run the Installer Program

The program itself can be downloaded from <http://www.asellertool.com/release/installer.zip>. After you download the file, unzip it and then run the program directly by selecting 'Run', in that case, go to Figure 5.

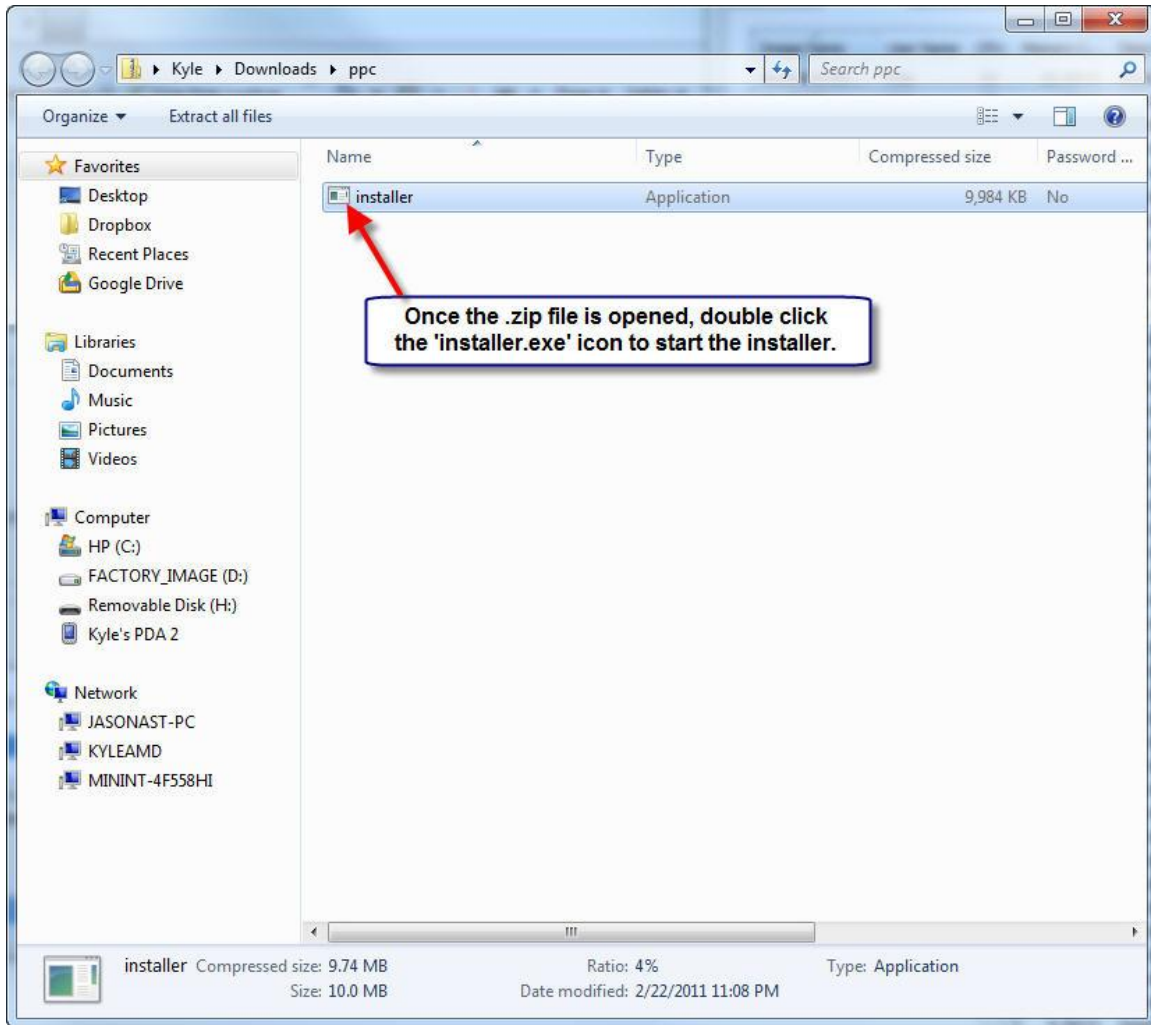


Figure 3

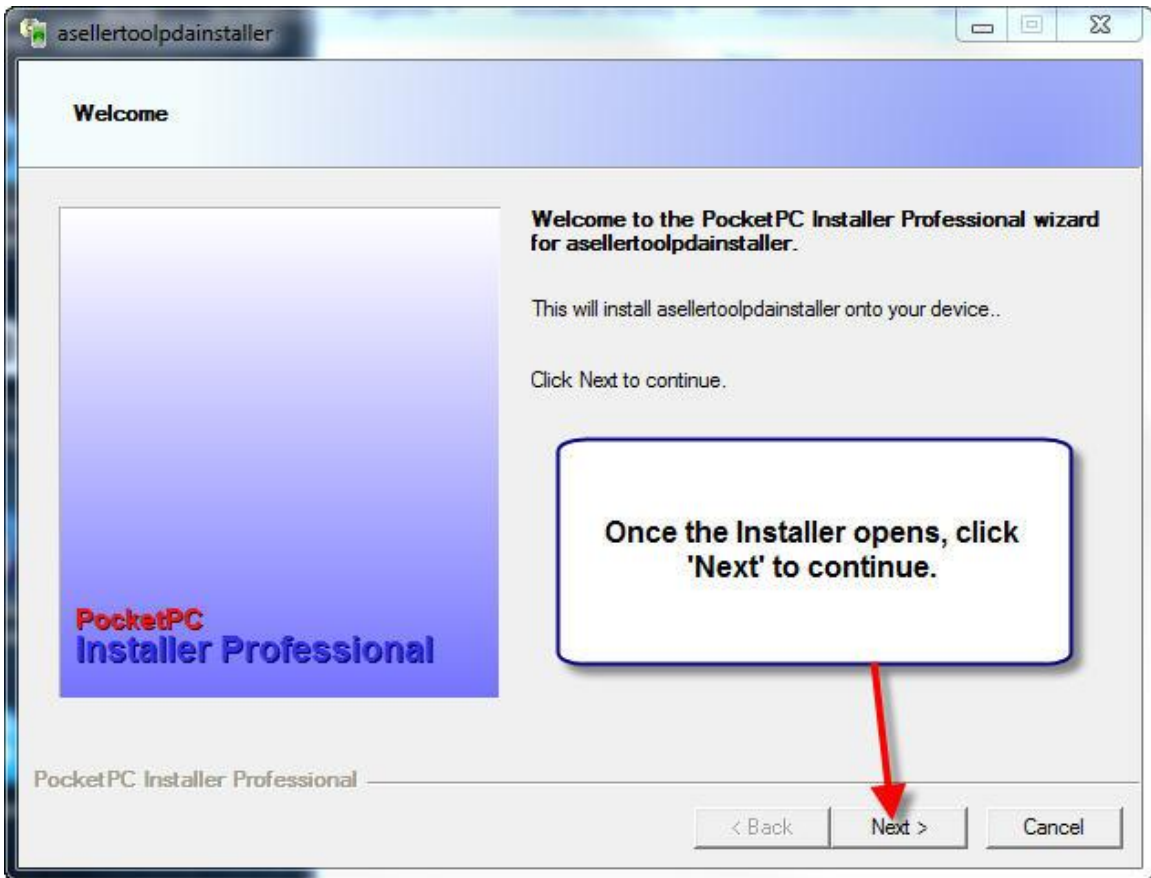


Figure 4

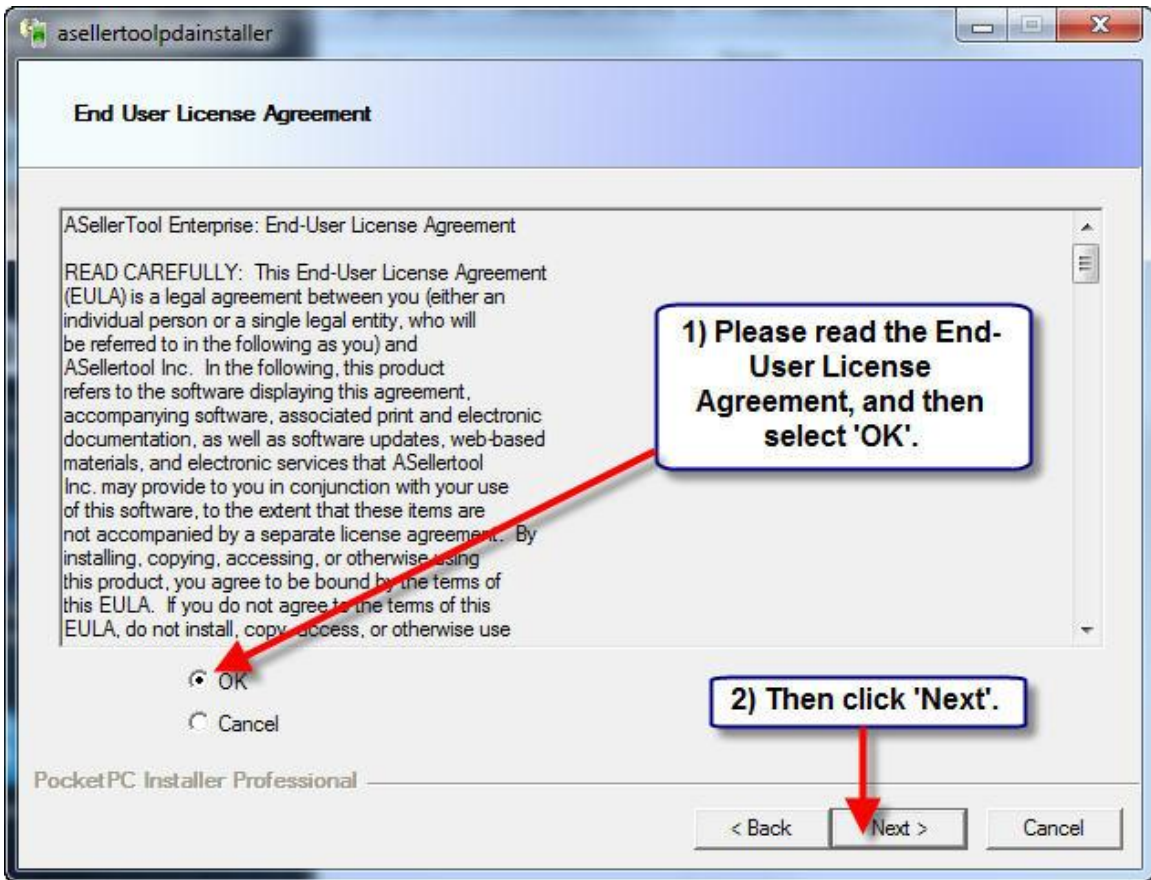


Figure 5

1.4: Deploy the Installer to the PDA, and Install ASellerTool

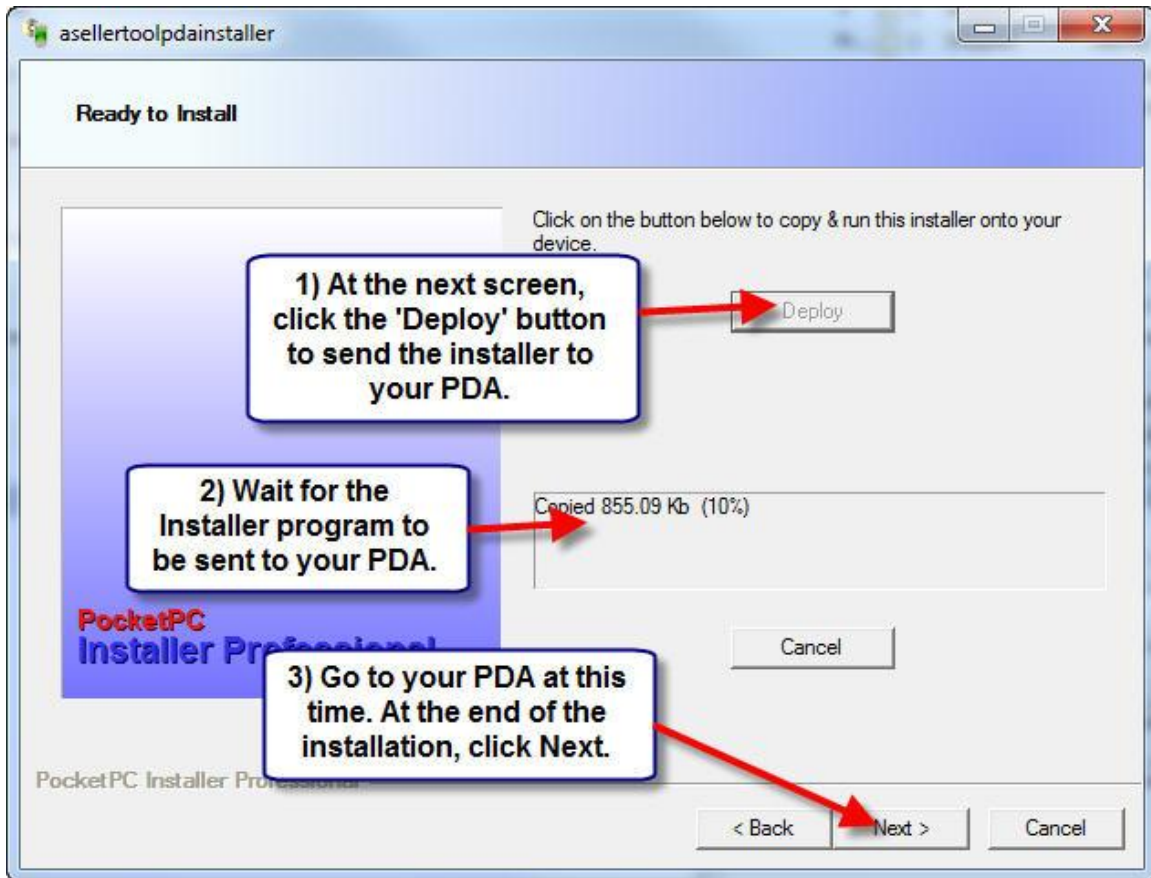


Figure 6

At this time, you should check your PDA.



Figure 7



Figure 8



Figure 9

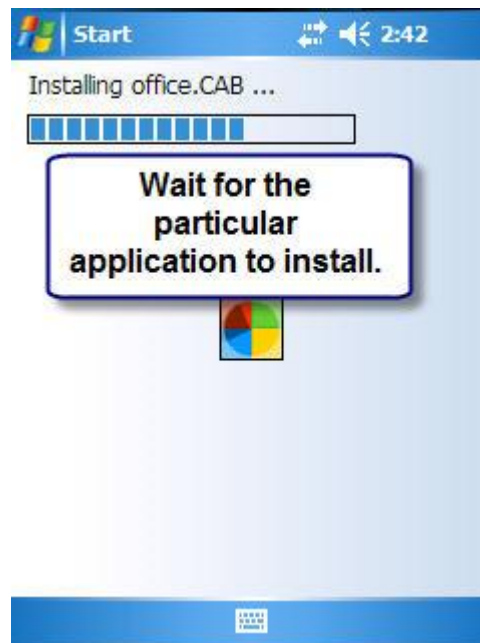


Figure 10



Figure 11

During installation, if you see specific screens below, it is important to follow the instructions below, or else there may be problems with the installation.

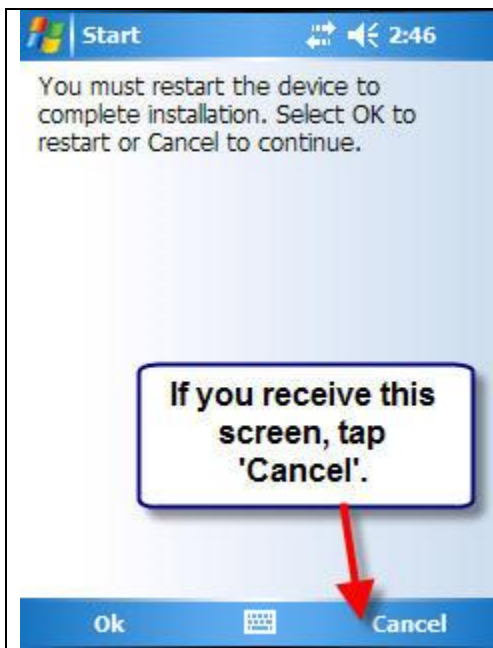


Figure 12



Figure 13

After this point, the installation should complete by itself, and the PDA should automatically reset. When the PDA starts back up again, you should see the ASellerTool screen will start automatically.

1.5: Configure the Scanner Button

Before you can get started with scanning, you'll want to make sure the proper button on the PDA both starts the scanner program and activates the scanner.



Figure 14

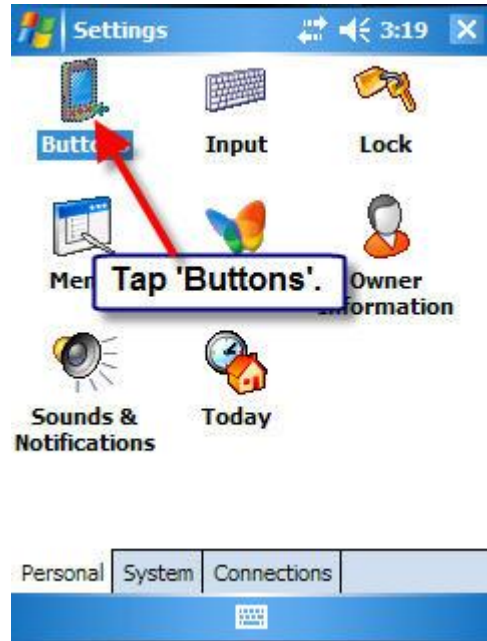


Figure 15



Figure 16



Figure 17

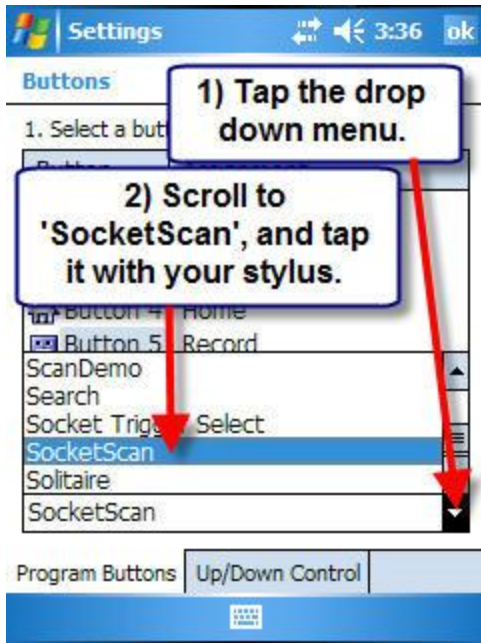


Figure 18

At this time, your PDA and top mounted scanner should be ready to scan. You then need to install our PC Downloader 9.0 to download the data. You can check the documents on [installing PC Downloader](#) and [how to use it](#).

1.6: Install Connect!Agent on the PDA for Socket Bluetooth Scanner

If you are using Socket Mobile Bluetooth scanner, then you need to install 'Connect!Agent', in order to connect their Bluetooth scanners to the PDA.

Connect!Agent can be downloaded at [here](#).

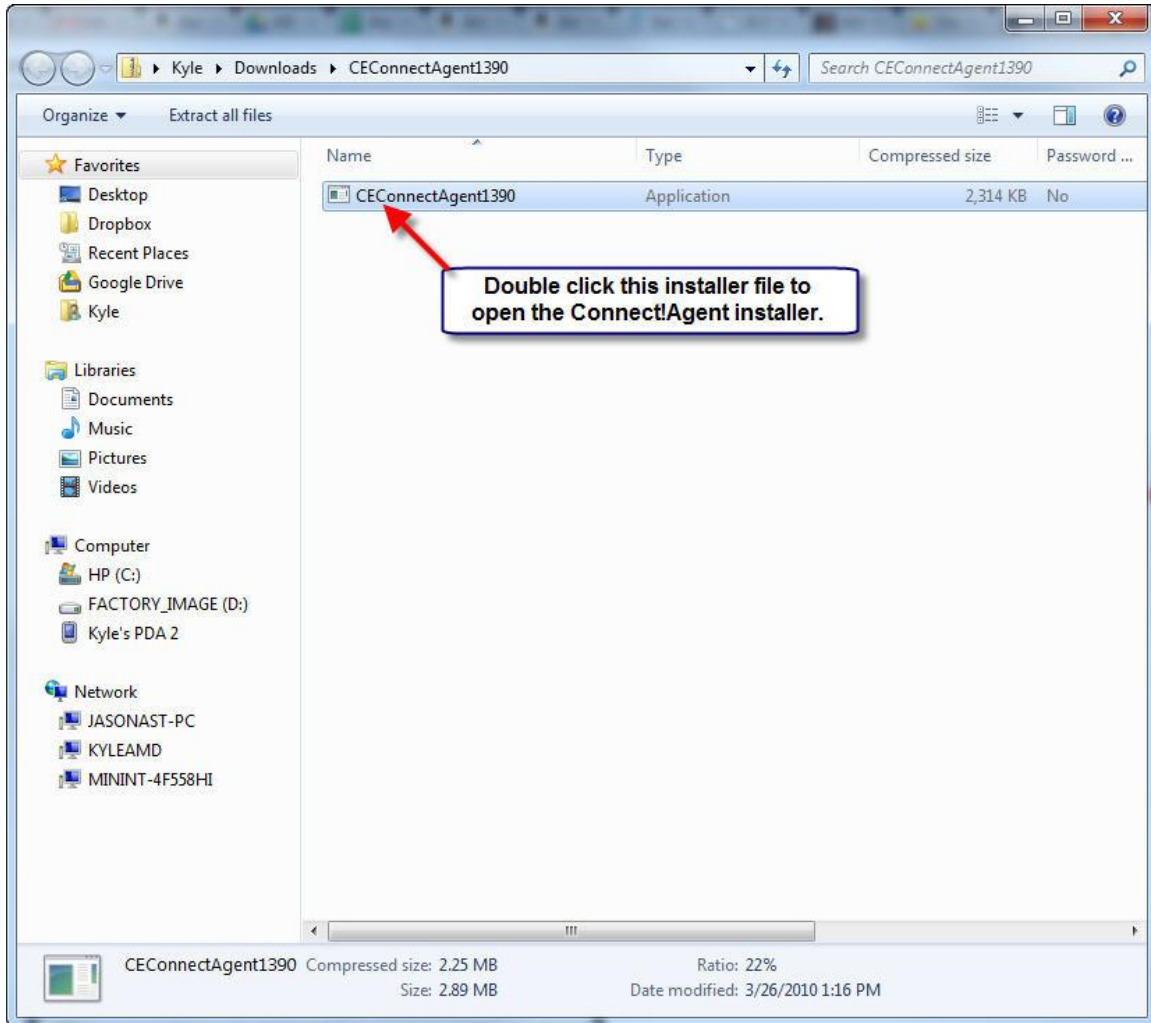


Figure 19

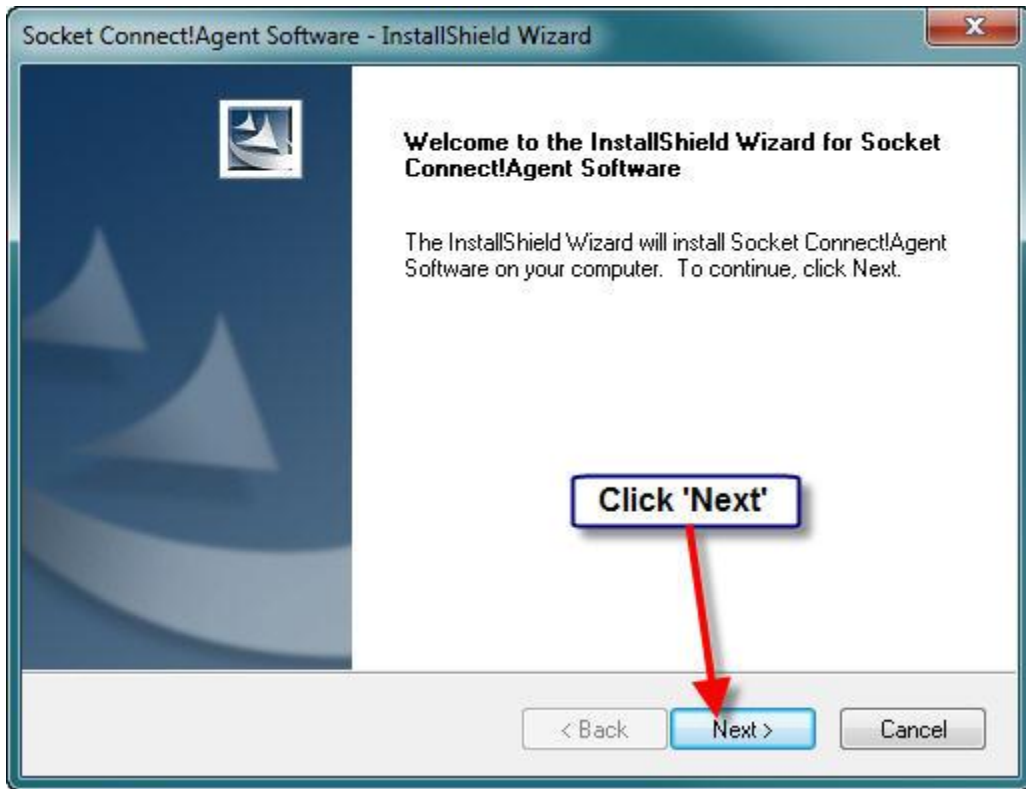


Figure 20

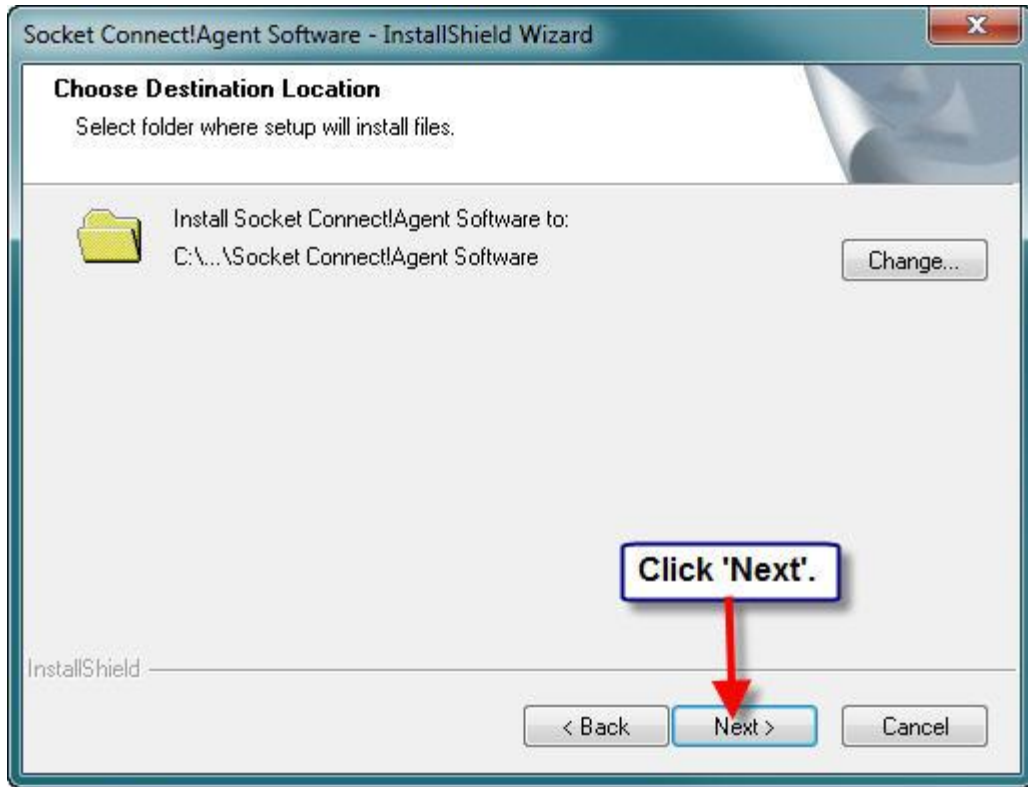


Figure 21

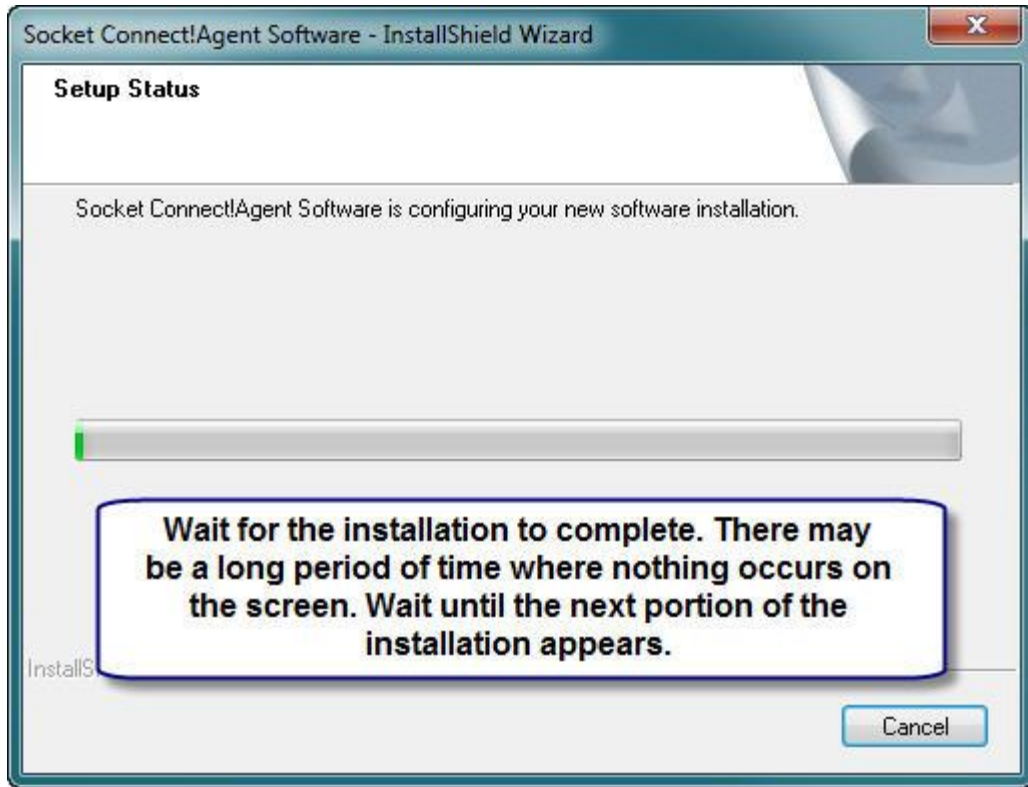


Figure 22

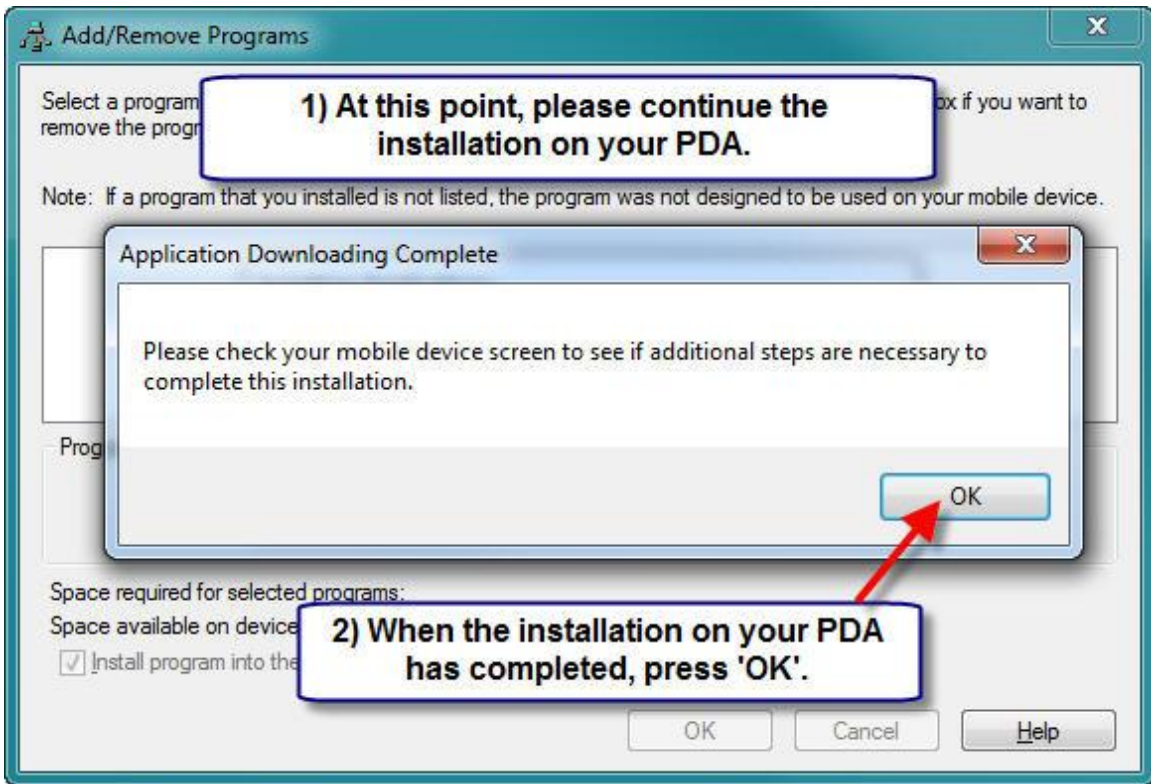


Figure 23



Figure 24



Figure 25



Figure 26

At this point, the installation of Connect!Agent is finished, and you may go back to the installer screen on your computer to finish.

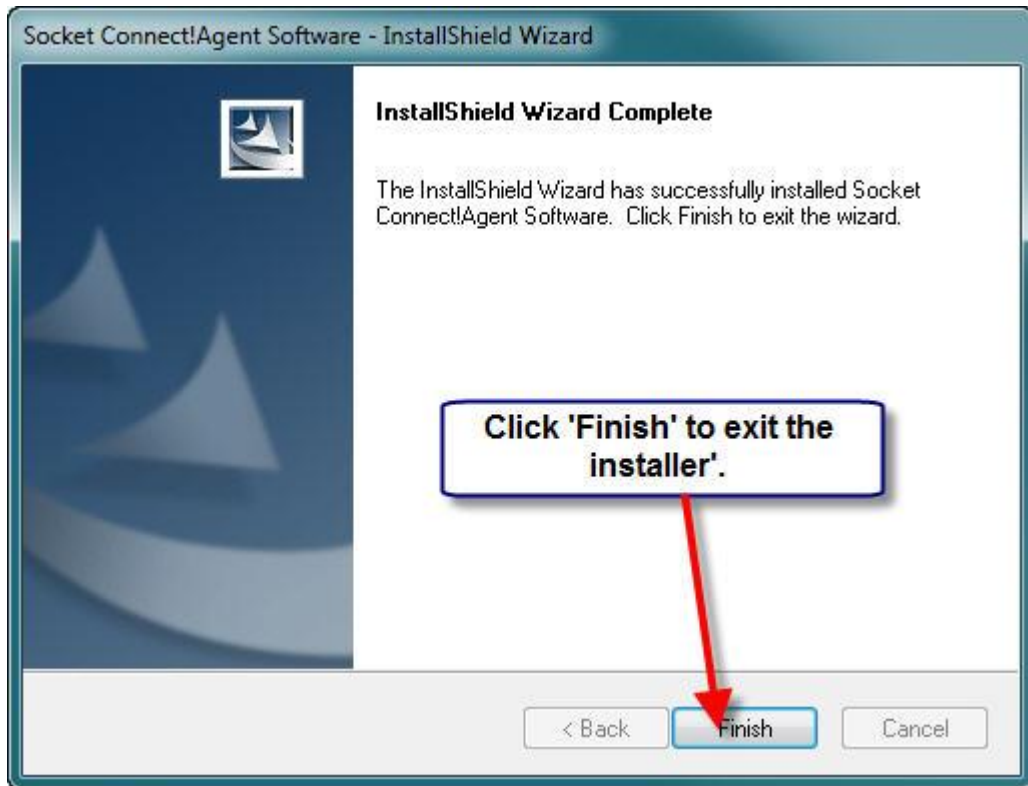


Figure 27

After Connect!Agent is installed on your PDA, please make sure to activate SocketScan by pressing button 5, and then go into settings, followed by the 'CS' tab to enable using a cordless scanner. Further instructions can be found in our tutorial on setting up a scanner with your PDA at http://www.asellertool.com/ent/support/7M_v3_setup.htm .

Chapter 2: SD Card Installer (Mac User)

This method of installation is used when customers are using Mac or cannot connect their PDA to their Windows computer.

2.1: Downloading and Positioning the Installer Program

The first thing you should do is insert your SD card into your computer, or into the USB SD card reader plugged into your computer USB port.

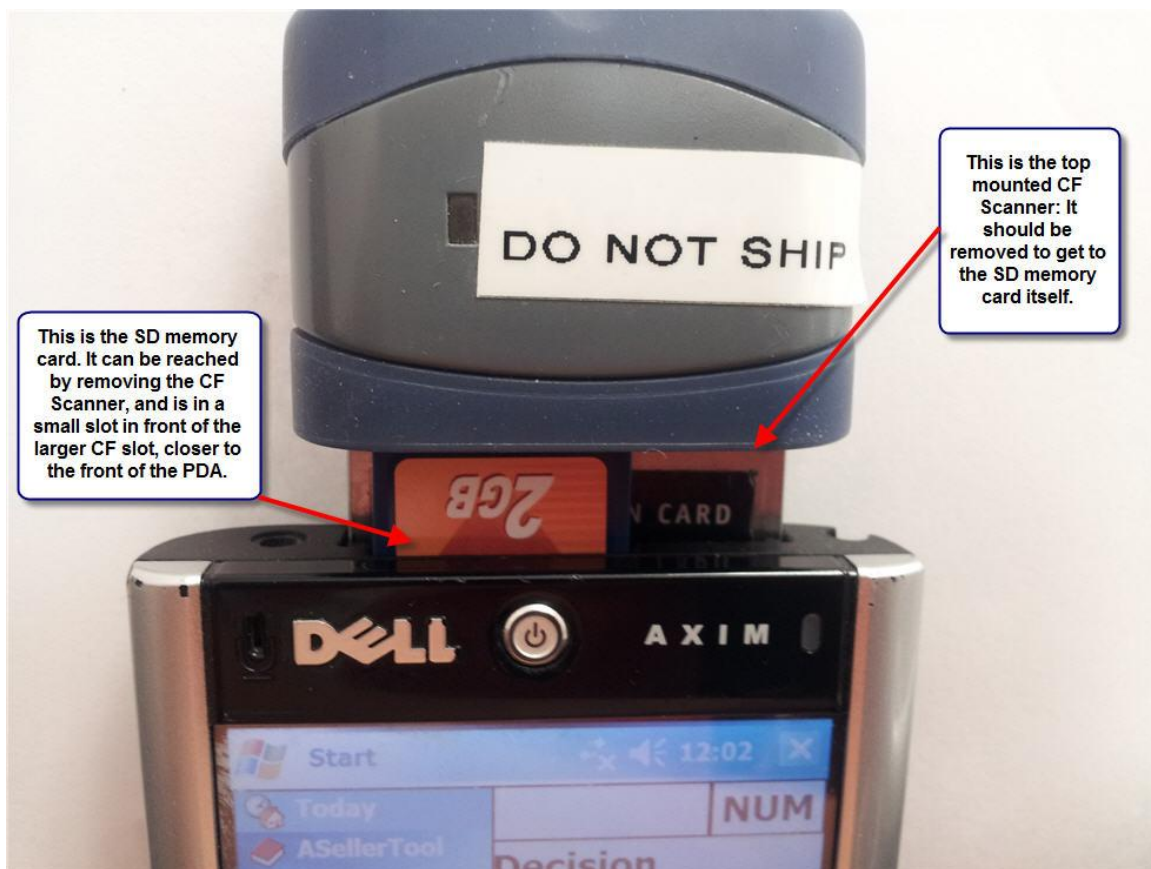


Figure 28



This is an example of the built-in card reader bank on a desktop computer. Note how the card sticks out here, and that the first letters above it are 'SD'.

Figure 29



Figure 30

After the SD card is inserted into the computer, you can then download the PDA installer from [here](#). Once downloaded, you'll unzip the file and move it to the inserted SD card.

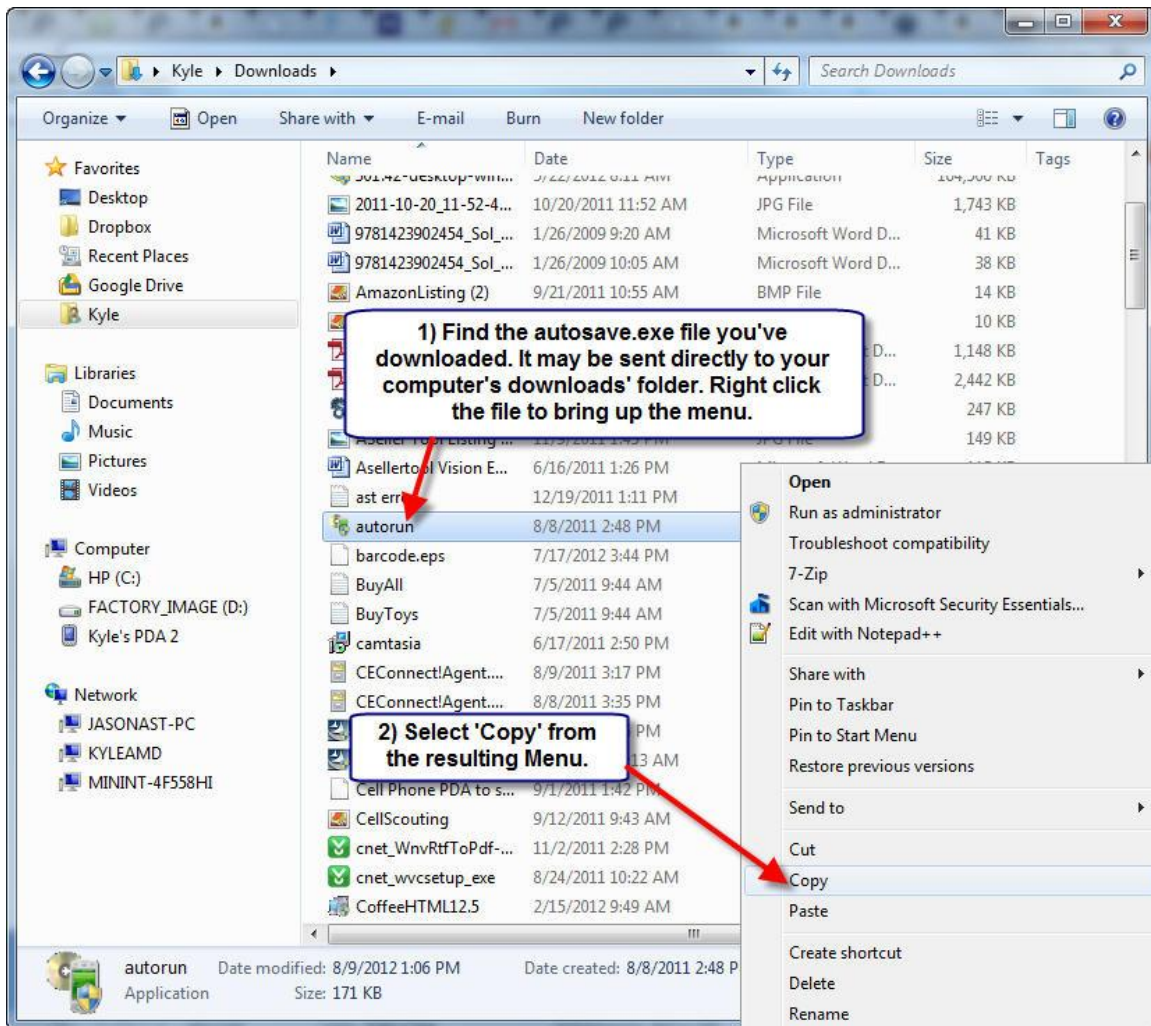
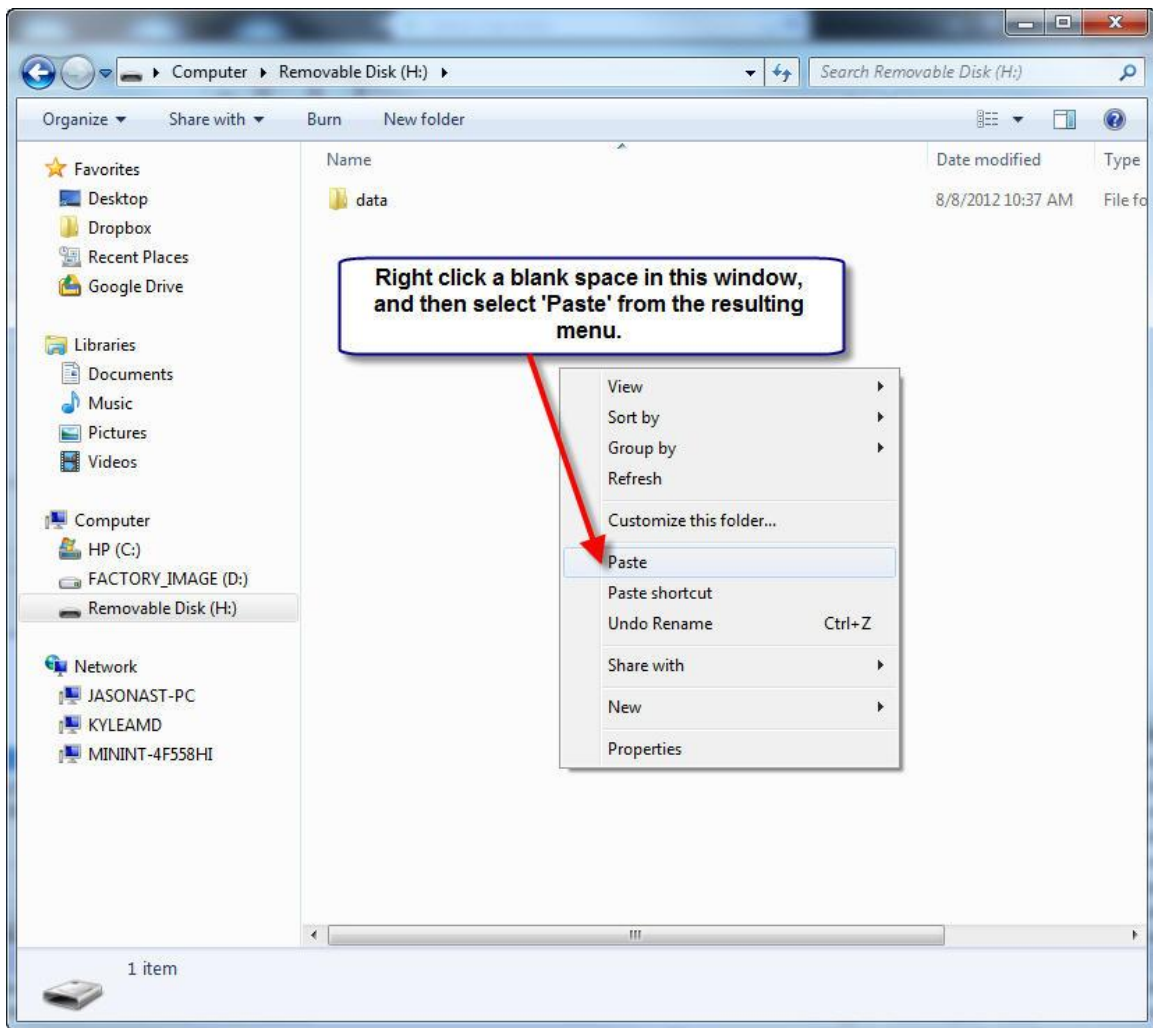


Figure 31



Figure 32



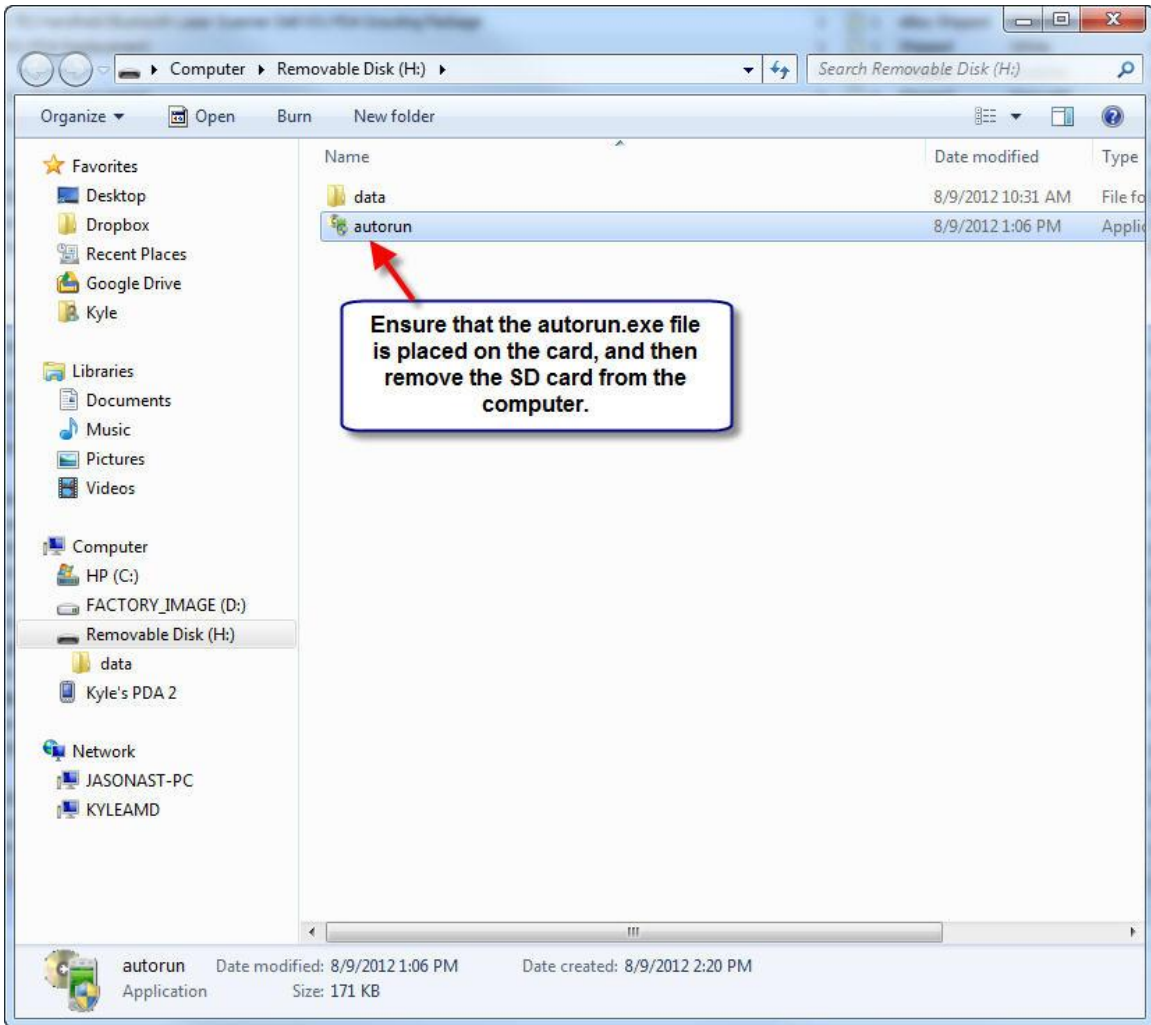


Figure 33

After the SD card is removed from the computer, insert the SD card in the PDA, before continuing with the next step.

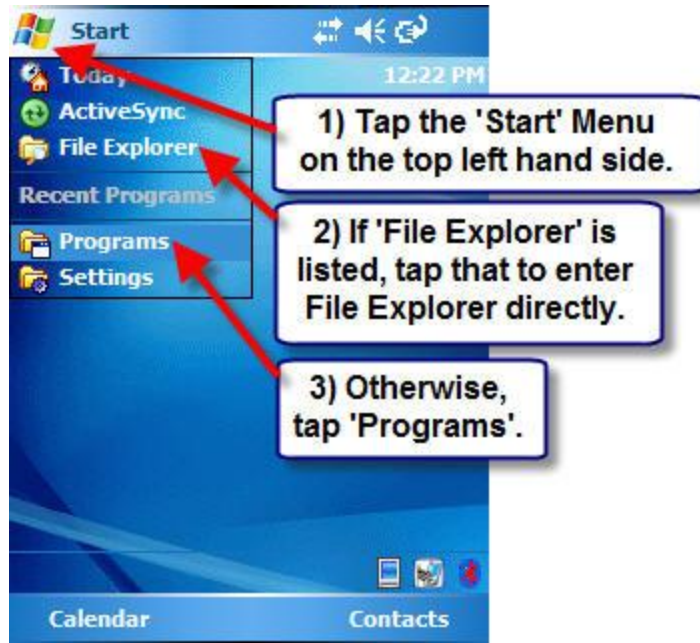


Figure 34

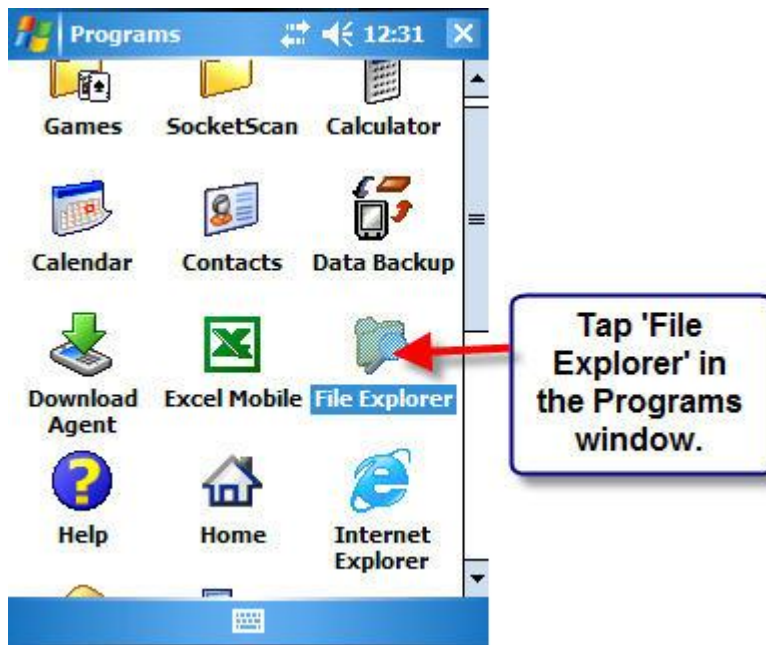


Figure 35

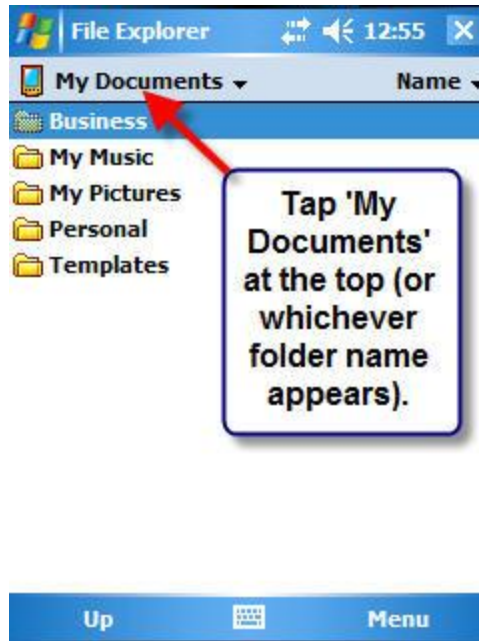


Figure 36



Figure 37



Figure 38

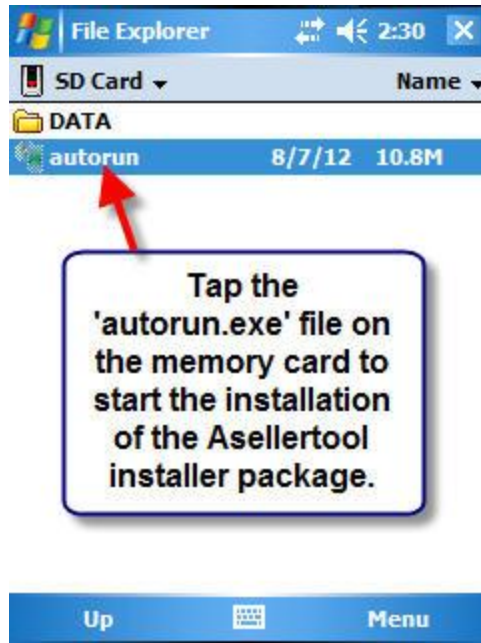


Figure 39

2.2: Installing the Program Package



Figure 40

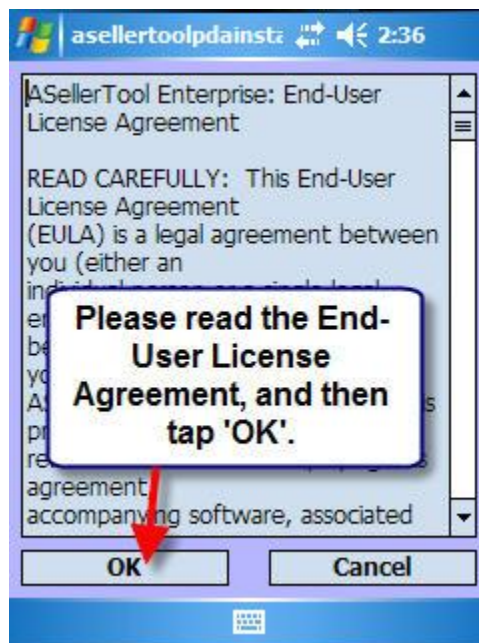


Figure 41

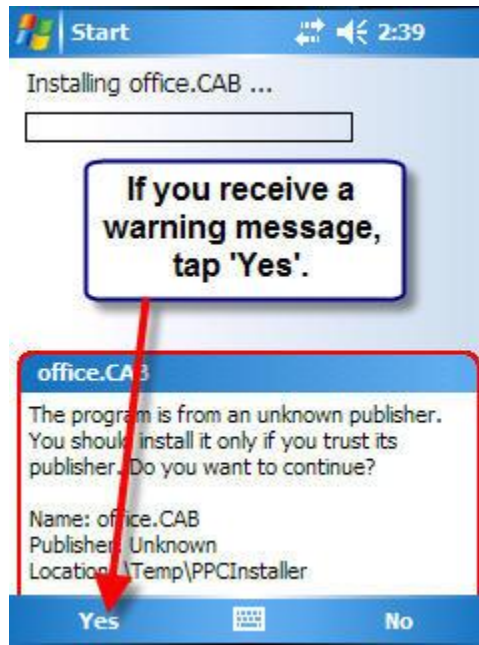


Figure 42



Figure 43

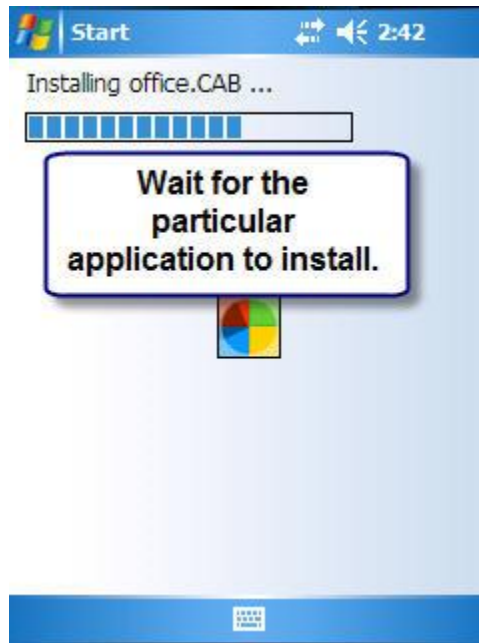


Figure 44



Figure 45

Additionally, after certain points in the installation, you will reach certain screens. It is **important to follow the instructions below, or else there may be problems with the installation.**



Figure 46



Figure 47

At this time, the program will automatically reset the PDA. Given that the program on the SD card needs to be named 'autorun', the program will restart after the PDA does. When you see the End-User License screen, **make sure you tap 'CANCEL' on the PDA.**

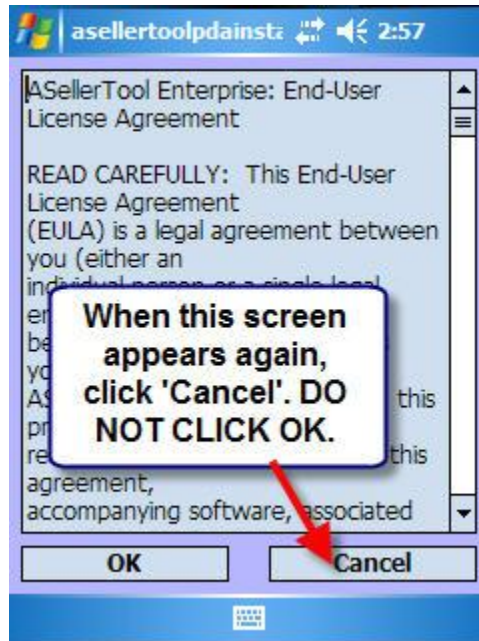


Figure 48

Navigate back to File Explorer and the SD card, as you did earlier, to delete the autorun program.

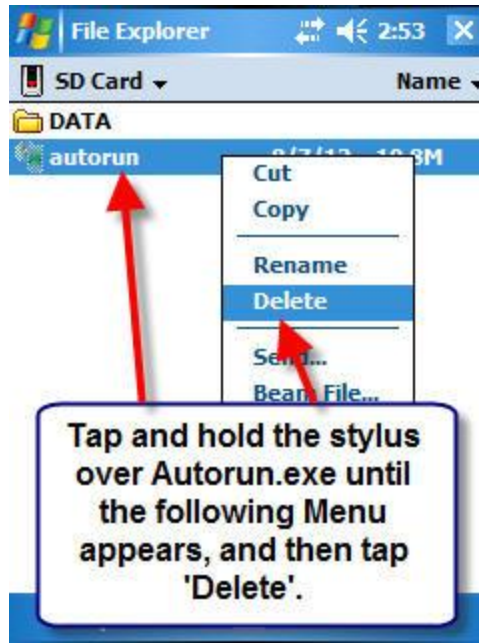


Figure 49

2.3: Socket Bluetooth Scanner User: Install Connect!Agent on the PDA via an SD card

For Windows Mobile 5 and 6 PDAs, download Connect!Agent at [here](#)

For Windows PocketPC 2003 PDAs, download download Connect!Agent at [here](#)

Once the files are downloaded, you will want to copy the .cab file from the downloads folder, and place it onto your inserted SD card.

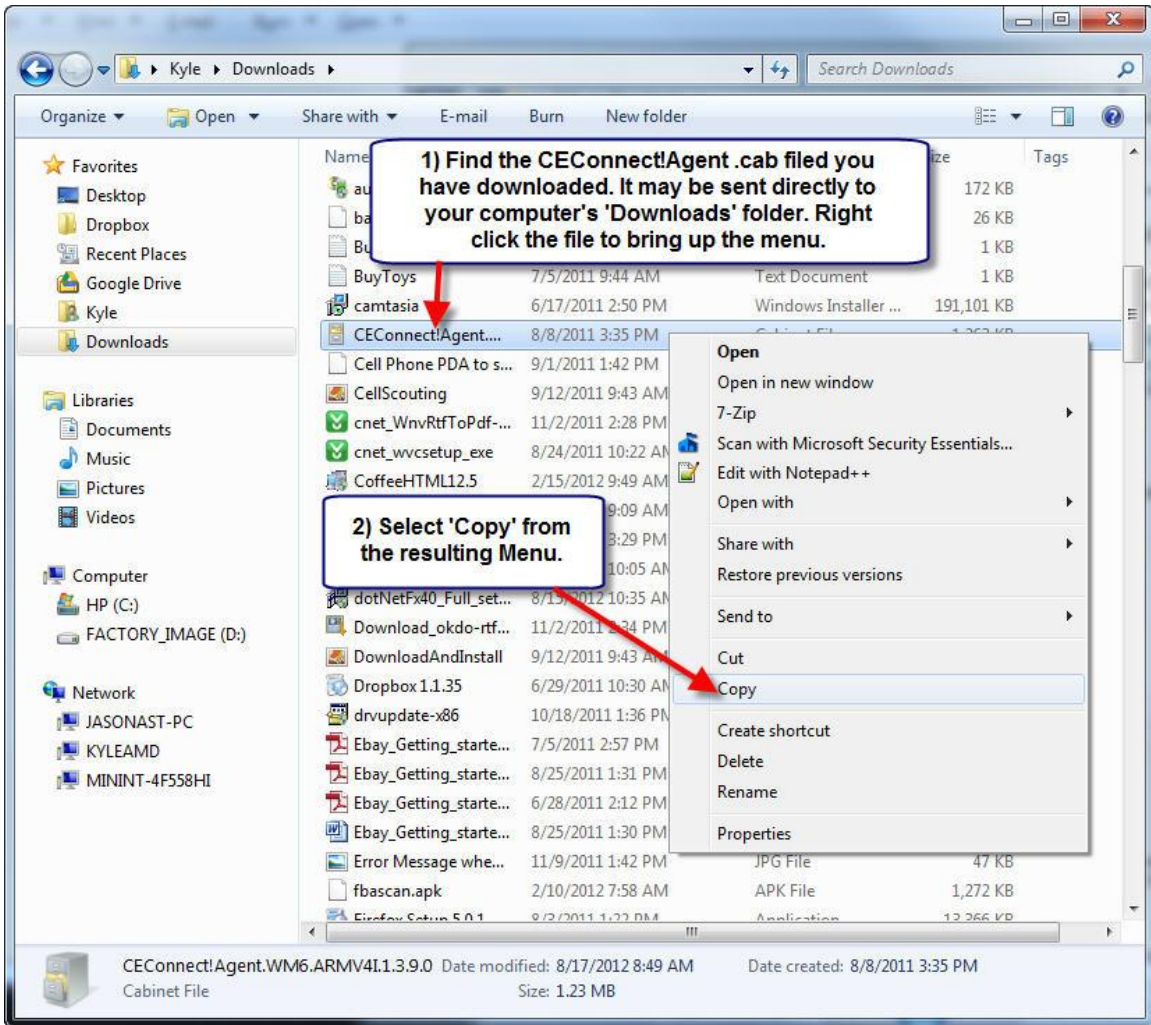


Figure 50



Figure 51

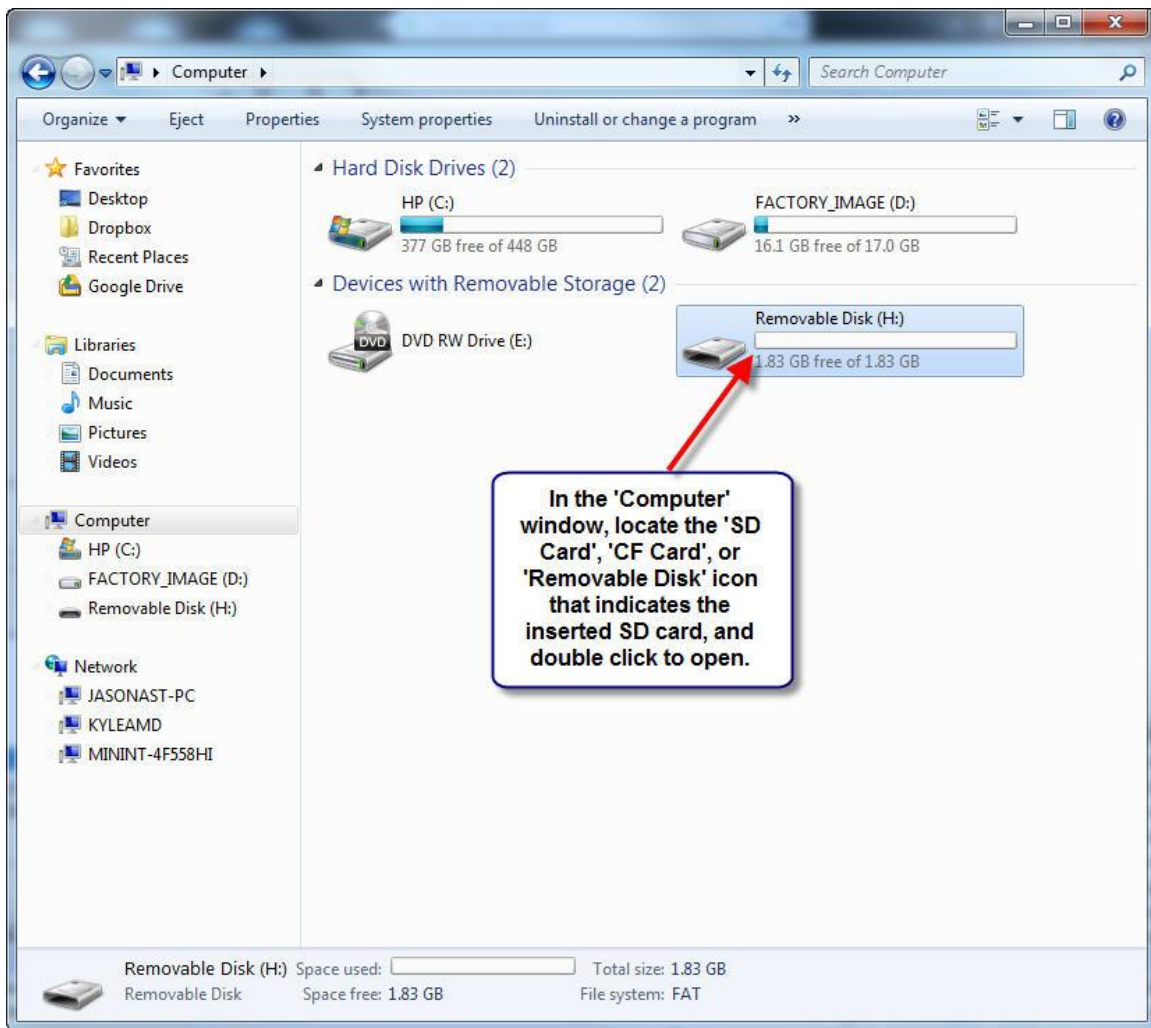


Figure 52

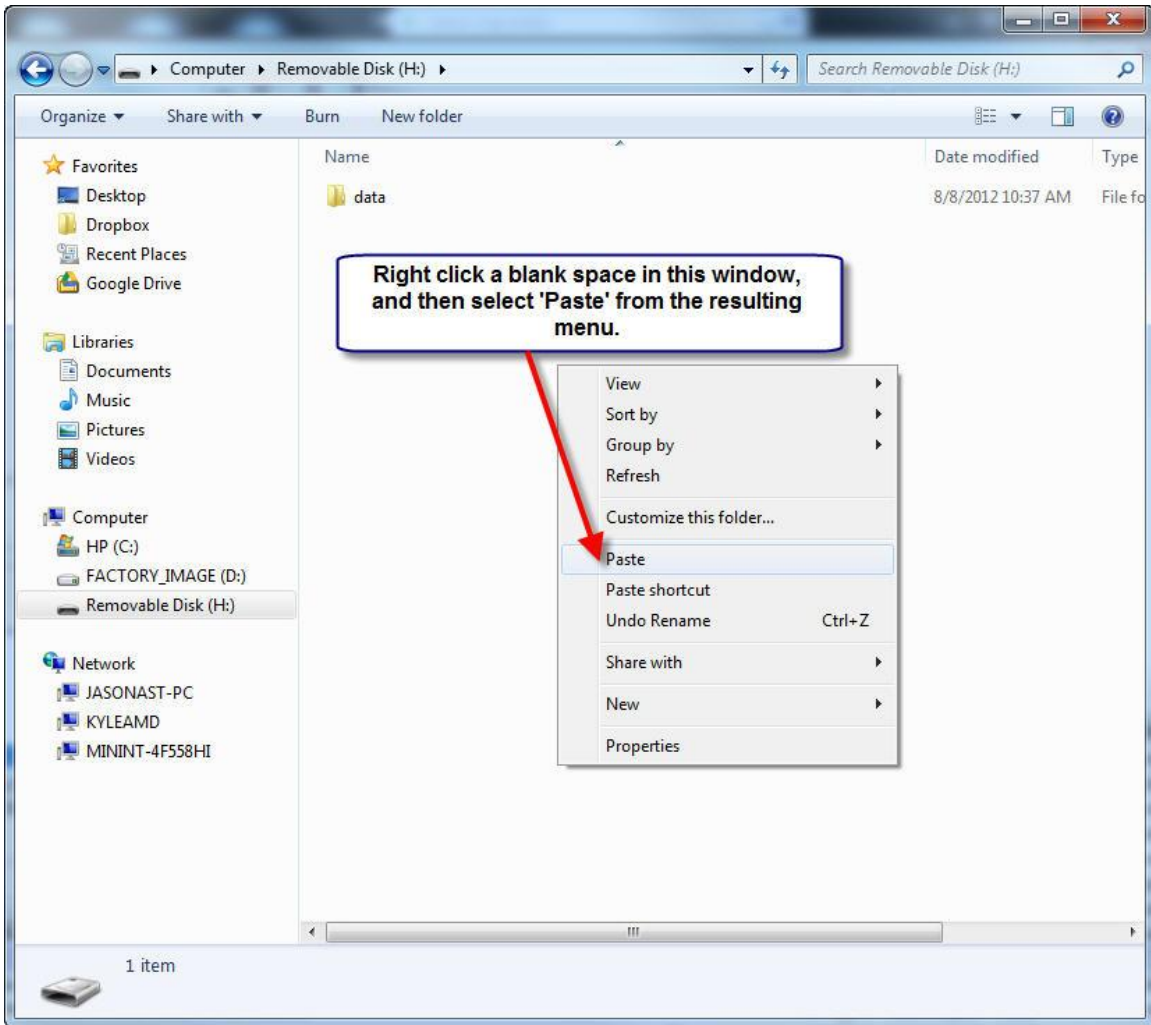


Figure 53

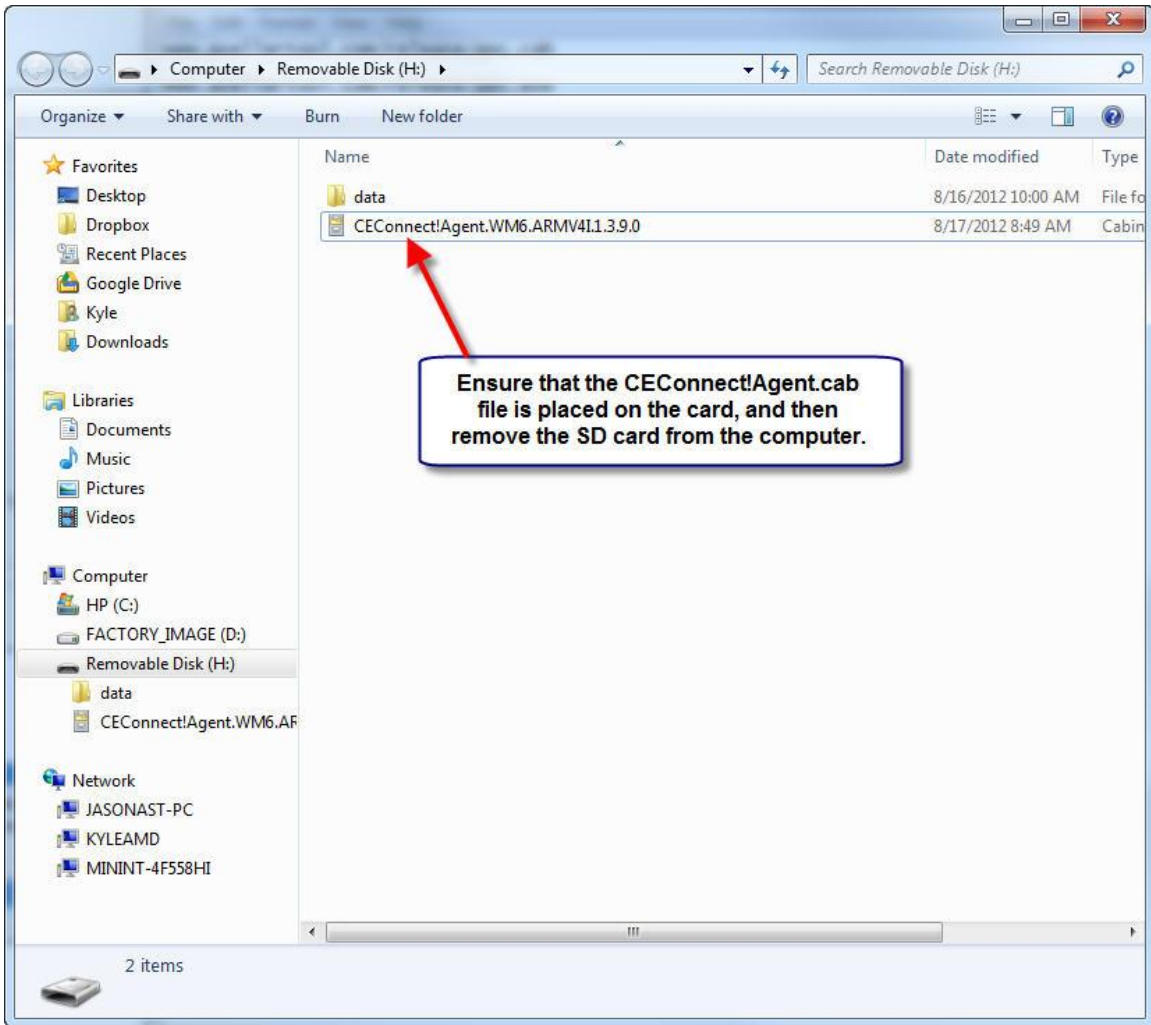


Figure 54

At this point, you will want to remove the SD card from the computer, and place it back into the PDA.

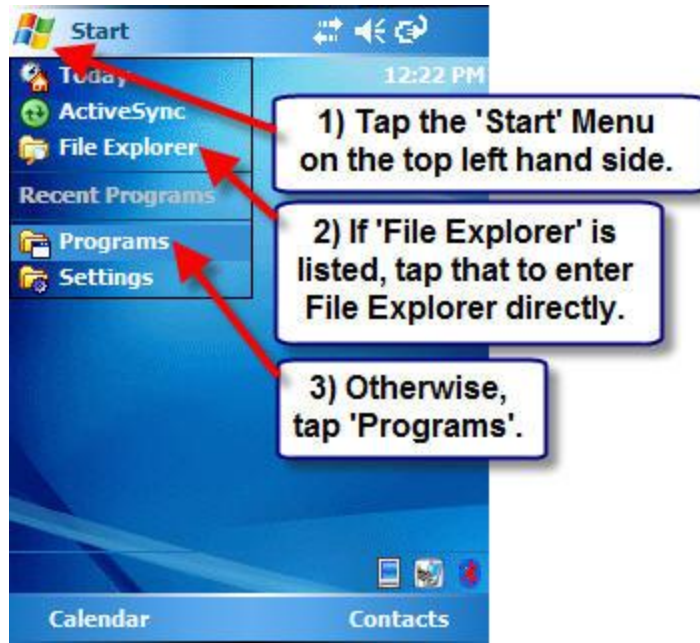


Figure 55

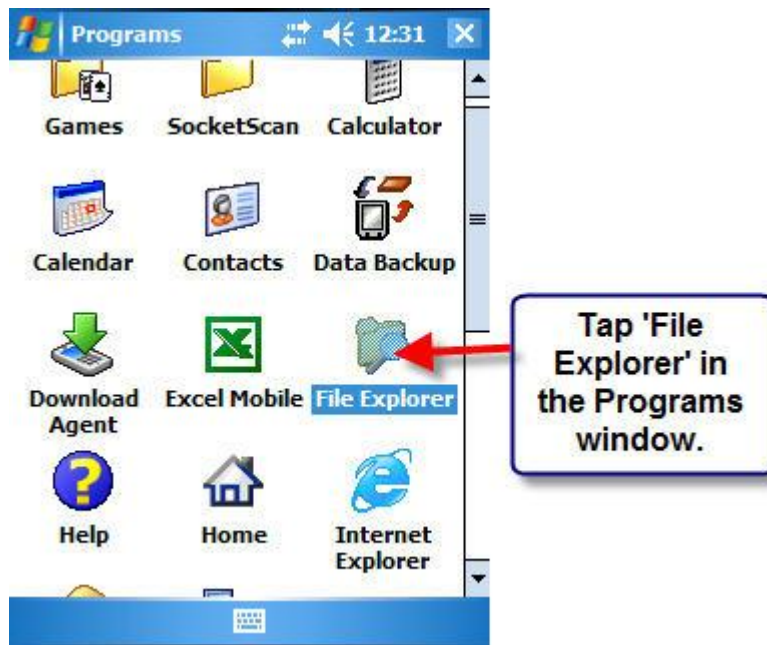


Figure 56

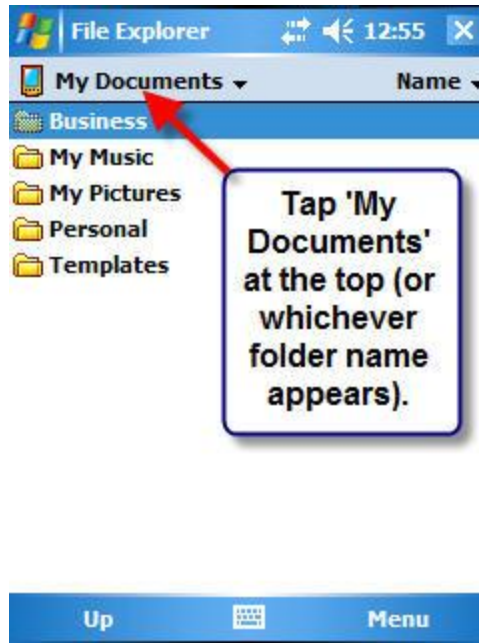


Figure 57



Figure 58

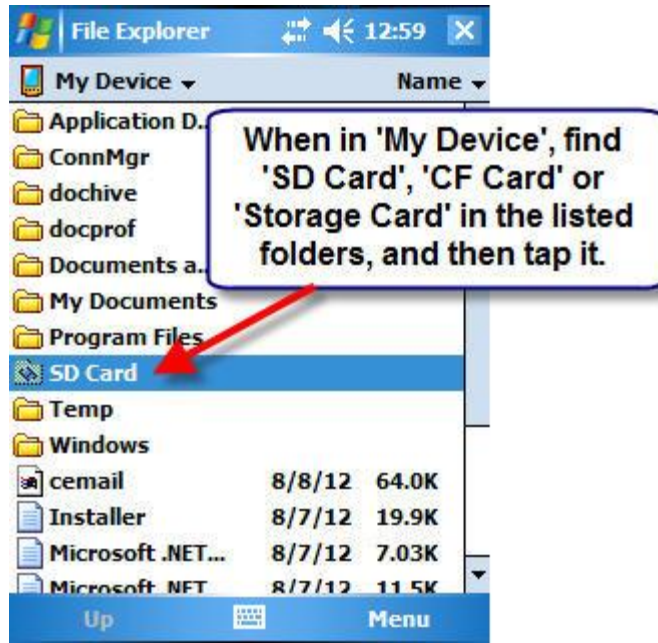


Figure 59

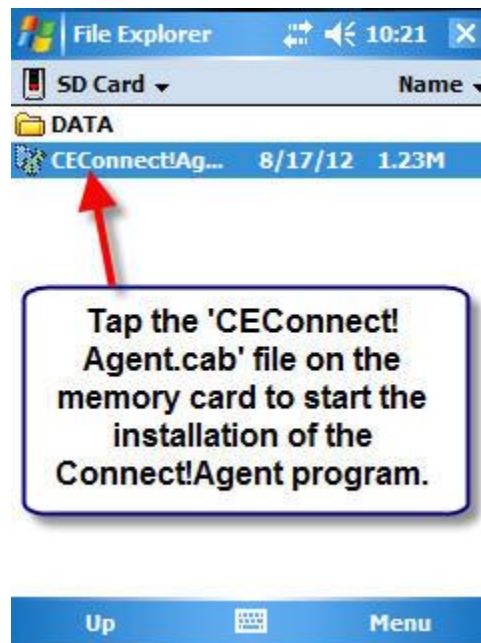


Figure 60

If you receive a warning message at the bottom of your screen, indicating that the program may be harmful, please bypass it by tapping 'Yes' to start the installation.



Figure 61



Figure 62



Figure 63

After Connect!Agent is installed on your PDA, please make sure to activate SocketScan by pressing button 5, and then go into settings, followed by the 'CS' tab to enable using a cordless scanner. Further instructions can be found in our tutorial on setting up a scanner with your PDA at [here](#).